

StruxureWare™ Building Operation

Automation Server

PS-24V Power Supply Module

Automation Server power supply modules are designed to accommodate the specific power requirements of StruxureWare™ Building Operation installations. The power supply module provides power to the Automation Server and its connected I/O modules.



Make the most of your energySM

StruxureWare Building Operation

Automation Server PS-24V Power Supply Module

Features



PRODUCT AT A GLANCE

- Reliable consistent output power
- Modular and scalable system
- Polarity independent
- Overload protection
- Patented two-piece design
- Hot-connect / Hot-swap
- Auto-addressing
- Simple DIN-rail installation
- Accommodates multiple row panel installations
- 30 W rating
- Status indicators

The PS-24V is a power supply module that accommodates 24 VAC or 24 VDC input power.

Reliable consistent output power

Each power supply module delivers reliable and consistent output power of 24 VDC to the backplane.

Modular and scalable system

This power supply supports the Automation Server and its family of I/O modules. This modular system delivers power and communications on a common bus. Connecting modules is a one-step process: just slide the modules together using the built-in connectors.

A 30 W power supply can deliver power to the Automation Server and a number of I/O modules calculated from the Power Budget Table (located on page 3). If more I/O modules are needed, another power supply can be added to the bus. The power supplies are isolated from each other while also providing communication pass-through.

Polarity independent

The power supply input (from main power) and output (to modules) are galvanically isolated. This removes the risk of damage due to earth currents and permits the input power to be wired without concern for polarity matching.

Overload protection


When a power supply module's load (total load of Automation Server, I/O modules, communication modules) exceeds its rating, the power supply will protect itself from being damaged.

Patented two-piece design

Each module can be separated from its terminal base to allow the site to be wired prior to the installation of the electronics.

The patented locking mechanism serves as handles for removing the module from its

base. All critical components have a protective cover that permits natural convection cooling to occur.



StruxureWare Building Operation

Automation Server PS-24 Power Supply Module

Features (continued)

Power Budget Table

Power Requirements	
	24 VDC Power
Automation Server	7 W
Input Only I/O	
DI-16	1.6 W
UI-16	1.8 W
Output Only I/O	
DO-FA-12	1.8 W
DO-FA-12-H	1.8 W
DO-FC-8	2.2 W
DO-FC-8-H	2.2 W
AO-8	4.9 W
AO-8-H	4.9 W
AO-V-8	0.7 W
AO-V-8-H	0.7 W
Mixed I/O	
UI-8/DO-FC-4	1.9 W
UI-8/DO-FC-4-H	1.9 W
UI-8/AO-4	3.2 W
UI-8/AO-4-H	3.2 W
UI-8/AO-V-4	1.0 W
UI-8/AO-V-4-H	1.0 W

Hot-connect / Hot-swap

Because critical applications require 24-hour operation, Schneider Electric designed the entire family of modules for hot-connection of terminal bases and hot-swapping of modules to and from their bases. This design ensures continuous power and communication during service operations.

Auto-addressing

The auto-addressing feature eliminates the need for setting DIP switches or pressing commission buttons. With the Automation Server family, each module automatically knows its order in the chain and assigns itself accordingly.

Simple DIN-rail installation

Fasteners easily snap into a locked position for panel installation. The fastener has a quick-release feature for easy DIN rail removal.

Accommodates multiple row panel installations

The Automation Server module family uses built-in connectors for single row connectivity. If a panel size requires multiple rows, an interconnection cable is available.

30 W rating

This power supply module can supply power for loads up to 30 W. The consumption of downstream modules can vary. A PS-24V can typically power an Automation Server and a number of I/O modules calculated from the Power Budget Table.

Status indicators

The front panel of the PS-24V module includes status LEDs for input and output power. The LED for input power indicates the status of the main power. The output power indicator shows if the power supply output is within the proper range.

StruxureWare Building Operation Automation Server PS-24 Power Supply Module Specifications

v1.1 Specifications

Electrical

I/O bus power

24 VDC, max. 30 W per I/O bus power supply, Class 2

Maximum addresses per I/O bus

32

AC input

Nominal voltage

24 VAC, 50/60 Hz

Operating range

24 VAC, $\pm 20\%$, 50/60 Hz

Input current

Max. 2.5 A rms

Recommended transformer rating

≥ 60 VA

DC input

Nominal voltage

24 to 30 VDC

Operating range

21 to 33 VDC

Power consumption

max. 40 W

DC output

Output voltage

24 V ± 1 V

Output power

max. 30 W

Mechanical

Enclosure

Eco Friendly ABS/PC

Enclosure rating

IP 20

Plastic rating

UL94-5VB rated plastic

Dimensions (including terminal base)

90 W x 114 H x 64 D mm

(3.6 W x 4.5 H x 2.5 D in.)

Weight (including terminal base)

0.285 kg (0.63 lb)

Weight (excluding terminal base)

0.186 kg (0.41 lb)

Installation

DIN-rail or panel installation

Operation environment

Ambient temperature, operating

0 °C to 50 °C (32 °F to 122 °F)


Ambient temperature, storage

-20 °C to +70 °C (-4 °F to +158 °F)

Humidity

Max. 95 % RH (non-condensing)

Dimensional drawing

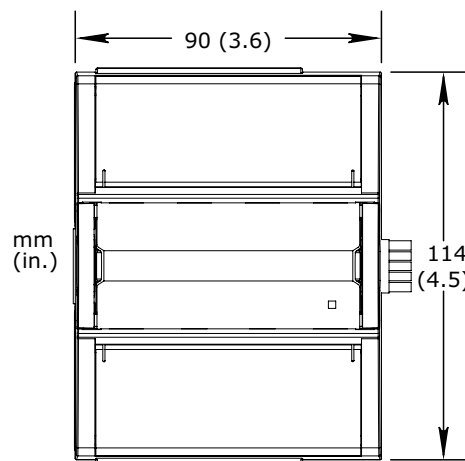

Agency compliances

Emission

C-Tick; EN 61000-6-3; FCC Part 15, Sub-part B, Class B

Immunity

EN 61000-6-2

Safety

UL 916 C-UL US Listed

Part numbers


PS-24V, Power Supply 24 VAC/VDC

P/N: SXWPS24VX10001

TB-PS-W1, Terminal Base for Power Supply (Required for each power supply)

P/N: SXWTBPSW110001

Connectors

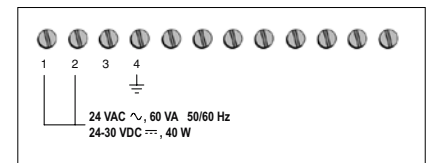

All brand names, trademarks and registered trademarks are the property of their respective owners. Information contained within this document is subject to change without notice.

Schneider Electric One High Street, North Andover, MA 01845 USA Telephone: +1 978 975 9600 Fax: +1 978 975 9698 www.schneider-electric.com/buildings

SDS-SXWBO-POWERSUPPLY-A4.BU.N.EN.12.2011.0.00.CC

January 2012 99